

Huawei OptiXstar EG8147X6 Datasheet 02


Huawei intelligent GPON and Wi-Fi 6 routing-type ONT

Overview

The Huawei OptiXstar EG8147X6 is an intelligent GPON and Wi-Fi 6 routing-type ONT. It uses the GPON Wi-Fi 6 technology to implement ultra-broadband access, high performance and wide coverage for users. The high forwarding performance ensures the user experience of voice, data and HD video services, and provides customers with an ideal all-optical access solution and future-oriented service support capability.

It provides 4 GE ports, 1 POTS port, 1CATV port, 1 USB port and 1 2.4G&5G Wi-Fi port.

- Next generation Wi-Fi 6 technology
- Smart service
- Smart interconnection
- Smart O&M

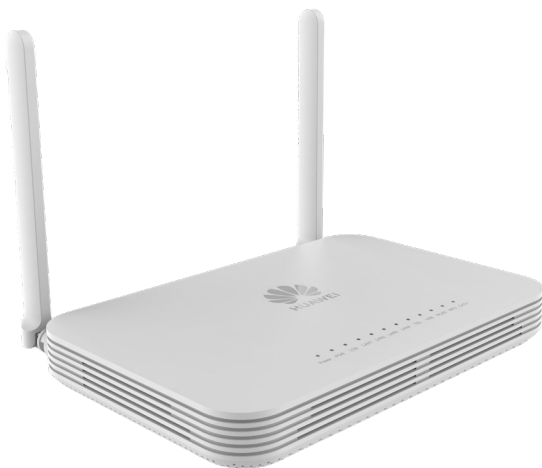

Device Parameters

Operating temperature	0°C to 40°C	NNI	GPON
Operating humidity	5% RH to 95% RH (non-condensing)	UNI	4*GE+1*POTS+1CATV+2.4G/5G Wi-Fi 6+1USB
Power adapter input	100–240 V AC, 50/60 Hz	Optical connector	SC/APC
System power supply	11–14 V DC, 1.5 A	Indicators	Power/PON/LOS/LAN/TEL/US

			B/WLAN/WPS
Static power consumption	12.1 W	Weight	Less than 600g
Maximum power consumption	18 W	Dimensions (H x W x D) (without external antenna and pads)	35 mm x 220 mm x 145 mm
Memory	128M Flash, 256M RAM		

Interface Parameters

<p>GPON port</p> <ul style="list-style-type: none"> • Class B+ • Receiver sensitivity: -27dBm ~ -29dBm • Overload optical power: -8 dBm • Wavelengths: US 1310 nm, DS 1490 nm • Wavelength blocking filter (WBF) of G.984.5 • Flexible mapping between GEM Port and TCONT • GPON: consistent with the SN or password authentication defined in G.984.3 • Bi-directional FEC • SR-DBA and NSR-DBA • Type B (single-homing&dual-homing) 	<p>POTS port</p> <ul style="list-style-type: none"> • Maximum REN: 4 • G.711A/μ, G.729a/b and G.722 encoding/decoding • T.30/T.38/G.711 fax mode • DTMF • Emergency calls (with the SIP protocol) <p>USB port</p> <ul style="list-style-type: none"> • USB2.0 • FTP-based network storage • File/Print sharing based on SAMBA • DLNA function
<p>WLAN</p> <ul style="list-style-type: none"> • IEEE 802.11 b/g/n/ax (2.4G) • IEEE 802.11 a/n/ac/ax (5G) • 2 × 2 MIMO (2.4G) • 2 × 2 MIMO (5G) • Antenna gain: 5 dBi • WMM/Multiple SSIDs/WPS • 2.4G&5G concurrent • Air interface rate: 574 Mbit/s (2.4G), 2402 Mbit/s (5G) • Beamforming • Band steering • DL OFDMA • DL MU-MIMO • 1024QAM • 160MHz frequency bandwidth • WPA3 	<p>Ethernet port</p> <ul style="list-style-type: none"> • Ethernet port-based VLAN tags and tag removal • 1:1 VLAN, N:1 VLAN, or VLAN transparent transmission • QinQ VLAN • Limit on the number of learned MAC addresses • MAC address learning • Auto-adaptive 10 Mbit/s, 100 Mbit/s or 1000 Mbit/s <p>CATV port</p> <ul style="list-style-type: none"> • Frequency Range 54 MHz to 1000 MHz • Output resistance 75 ohms • Received average optical power: -8dBm to +2dBm • RF output power: ≥17dBmV/Ch (With RF source analog channel power input = 20dBmV/ch, and 40 analog / 63 digital channels (4.3% OMI analog, 2.15 % digital))

Product Function


<p>Smart interconnection</p> <ul style="list-style-type: none"> • Smart Wi-Fi coverage • SIP/H.248 auto-negotiation 	<p>Smart service</p> <ul style="list-style-type: none"> • Scheduled Wi-Fi shutdown • Smart Wi-Fi sharing: 	<p>Smart O&M</p> <ul style="list-style-type: none"> • IPTV video quality diagnosis 	<p>Common O&M</p> <ul style="list-style-type: none"> • OMCI/Web UI/TR069 • Variable-length OMCI
--	--	--	--

<ul style="list-style-type: none"> Any port any service Parental control 	Portal/802.1x authentication; SoftGRE-based sharing	<ul style="list-style-type: none"> eMDI Rogue ONT detection and isolation from the OLT Call emulation, and circuit test and loop-line test PPPoE/DHCP simulation testing WLAN emulation 	messages <ul style="list-style-type: none"> Dual-system software backup and rollback
Multicast	Security	Layer 3 features	Home network feature
<ul style="list-style-type: none"> IGMP v2/v3 proxy/snooping MLD v1/v2 snooping 	<ul style="list-style-type: none"> SPI firewall Filtering based on MAC/IP/URL addresses 	<ul style="list-style-type: none"> PPPoE/Static IP/DHCP NAT/NAPT Port forwarding ALG, UPnP DDNS/DNS server/DNS client IPv6/IPv4 dual stack, DS-Lite and IPv6 SPI Static/Default routes Multiple services on one WAN port 	<ul style="list-style-type: none"> Visualized home network management User-defined bandwidth allocation Wi-Fi optimization & Wi-Fi roaming Wi-Fi O&M intelligent identification and anti-interference
Power saving	QoS		
<ul style="list-style-type: none"> Indicator power saving COC V7 	<ul style="list-style-type: none"> Ethernet port rate limitation 802.1p priority SP/WRR/SP+WRR Broadcast packet rate limitation 		

Copyright © Huawei Technologies Co., Ltd. 2020. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base Bantian,
Longgang Shenzhen 518129 People's
Republic of China

Website: <http://www.huawei.com>