


# AOR03R-60 receiver



## 204MHz Quad Wideband Receiver Module

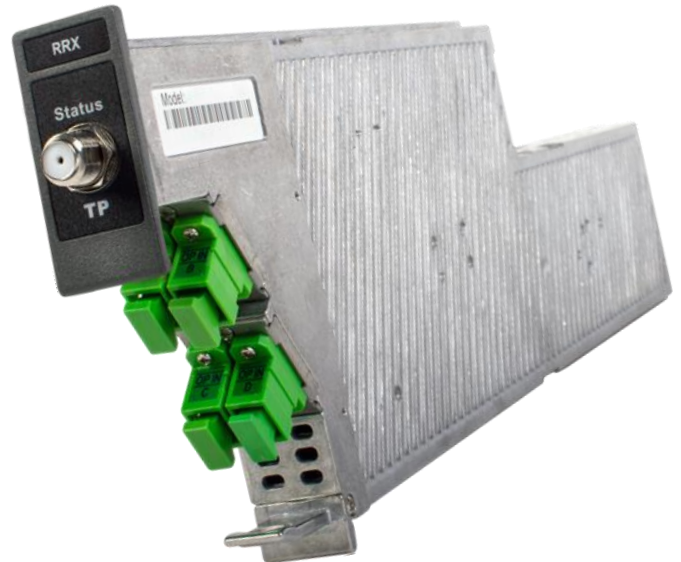

### FEATURES

- 204MHz DOCSIS 3.1 Ready
- Plug & play and hot-swappable modules
- Four independent receivers
- High output level

PARAMETER	SPECIFICATION	UNIT
Wavelength	1290 - 1610	nm
Reflection loss	Min. 40	dB
Input Optical Power	-18 - +1	dBm
Optical Connector	SC/APC	
RF Frequency Range	5 – 204	MHz
RF Output Signal Level	30	dBmV/ch
RF Return Loss	≥16	dB
Level at Test Port	-20±1	dB
Working Temp.	-20°C~+50°C	°C
Relative Humidity	15~95 (non-condensation)	%
Power Consumption	≤ 15	W
Dimension	118.5 (H) × 22 (W) × 441.4 (D)	mm
Weight	0.75	kg

**DOCSIS 3.1 READY**

**vectorsolutions.net**