

Touchstone CM3500

DOCSIS 3.1 Cable Modem

FEATURES

- 2x2 OFDM/OFDMA DOCSIS® 3.1 channels
- 32x8 SCQAM EuroDOCSIS® 3.0 channels
- Full Band Capture Tuner (FBC)
- Switchable US filter options include: 5-85MHz or 5-204MHz
- DS frequency range: : 108/258-1218MHz
- Multi Processor Technology
- 1 Port 2.5 Gigabit Ethernet LAN
- Multiple L2VPN BSoD support with OAM extensions
- TR143 Speedtest
- PNM based network monitoring and diagnostics
- DS / US spectrum analyzer functionality



PRODUCT OVERVIEW


The CM3500 DOCSIS 3.1 implementation allows unprecedented data rates to be delivered to subscribers. The CM3500 is designed to enable deployment of multi-gigabit data services (up to 2.5Gbps max). The Switchable Diplexer provides for flexible RF performance, reduced potential for interference in the home network, and flexibility in a Service Provider's transition from DOCSIS 3.0 to DOCSIS 3.1. Overall, this feature-packed unit is intended to serve as the hub of a subscriber's network, connecting all IP-capable devices throughout the customer premises.

With residential high-speed data service, support is a top concern. The CM3500 distinguishes itself by providing tools to minimize the complexity of support. US and DS spectrum analysis along with proactive network management-based diagnostics take the monitoring and diagnostic capabilities of the CM3500 to a premium level. OAM extensions to L2VPN allow for system-level provisioning and diagnostics. Multiple provisioning methods (SNMP and Configuration File) allow custom-designed setup to be applied to monitor the end user more efficiently. An intuitive Graphical User Interface eases troubleshooting and control. The CM3500 is defining the future for advanced residential and SOHO services.

Touchstone CM3500 DOCSIS 3.1 Cable Modem



DOCSIS 3.0 vs DOCSIS 3.1 Speeds

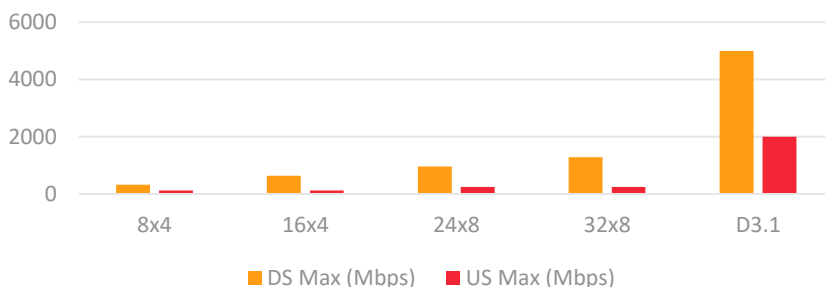

SPECIFICATIONS

Physical

Operating Temp (°C)	0 – 40
Operating Relative Humidity	5-95% (Non-Condensing)
Storage Temp (°C)	-40 to 70
Dimensions, HxWxD (in)	7.1 x 2.4 x 6.0
Weight (lbs) °C	0.94
Diagnostic LEDs (Front)	Power, Online
Diagnostic LEDs (Rear)	Ethernet Link/Speed

Interfaces

RF Interface	1 External 'F' Connector
Data Interfaces	1x 100/1000/2500 Base-T Ethernet RJ-45
Input Voltage (Nominal)	12VDC, 1.5A (adapter) 100-220V, 60Hz, 0.6A

SPECIFICATIONS

RF Downstream

Bonded Channels	Up to 32 SC-QAM and/or 2 OFDM
Tuner Configuration	Full Capture Tuning Range
Frequency Range (MHz)	108/258 – 1218 (DOCSIS)
Data Rate (Gbps, Max)	2.5
RF Input Sensitivity Level (dBmV)	-15 to +15 (DOCSIS)

RF Upstream

Bonded Channels	Up to 8 SC-QAM and/or 2 OFDMA
Frequency Range (MHz)	5 – 85 / 5 – 204 (DOCSIS)
Configurable Diplex Filter (MHz)	85 or 204 options
Data Rate (Gbps Max)	2.5
RF Output Level (dBmV)	+57 (64QAM, single US) +54 (64QAM, 4-8 US) +58 (16QAM, single US) +65 (OFDMA)

ORDERING NUMBER

1001725 CM3500B/CE-204,D3.1, 108/258-1218 SWITCH DS DIPLEXER, 5-85/204 SWITCH US DIPLEXER,1-ENET(2.5G),EUR

CUSTOMER CARE

Contact Customer Care for product information and sales:

- United States: 866-36-ARRIS
- International: +1-678-473-5656

(rev 01-2023)

Note: Specifications are subject to change without notice. **Copyright Statement:** ©ARRIS Enterprises, LLC, 2016. All rights reserved. No part of this publication may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from ARRIS Enterprises, LLC ("ARRIS"). ARRIS reserves the right to revise this publication and to make changes in content from time to time without obligation on the part of ARRIS to provide notification of such revision or change. ARRIS and the ARRIS logo are registered trademarks of ARRIS Enterprises, LLC. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks or the names of their products. ARRIS disclaims proprietary interest in the marks and names of others. The capabilities, system requirements and/or compatibility with third-party products described herein are subject to change without notice. www.arris.com